

THE POWERLINE SERIES

12-00130

Feed-through filters - Single Phase

Features

- High performance filtration
- Compact design
- Easy installation
- Cost effective protection

The in-line Feedthrough range of surge suppression filters are designed to be 'hard-wired' in single phase, fixed equipment applications or in applications where multiple equipment is used in one area.

This product offers a cost effective solution, whilst providing effective filtration and transient protection.




Specifications	Single
Max continuous voltage	230 - 205VAC
Max continuous current	100A
Earth leakage current	5mA
Max current ismax (8/20)	See note 1
Residual voltage at 5kA (8/20)	See note 1
Response time	See note 1
Temperature range	-20°C to +70°C
Connections	8mm studs
Filtration	-70dB at 100KHz


Note 1:

The units must be installed with primary surge protectors type SS40. See data sheet on SS40.

Dimensions

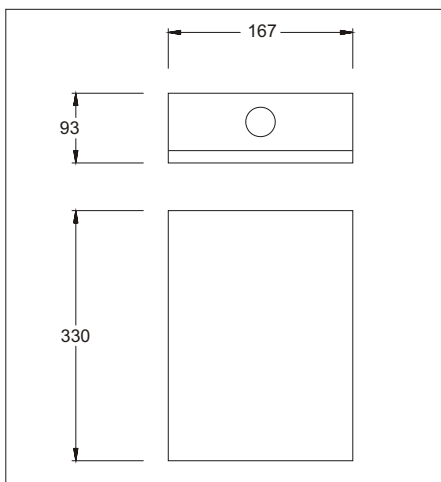

Connection

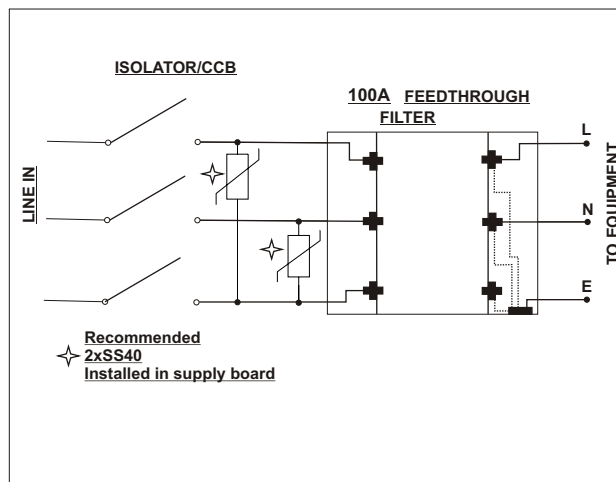

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1111

Fax: +27 (0) 11 314-3880

E-mail: sales@clearline.co.za

www.clearline.co.za

